Evolution from Vector to Raster Graphics



History:

Vector

- **Drive a oscilloscope with x and y deflections**
- **Calligraphic or line drawing display ('50s)**
- **Phosphors decay, thus must be refreshed: *display list***

Raster

- **Motivated by television ('30s)**
- **Refresh monitor from framebuffer ('70s)**
- **Advantage: images very general (tv,text,movies)**
- **Disadvantage: original cost of memory, low-level**

Resolution

World is continuous, digital media is discrete ...

Three aspects:

- **Color and intensity resolution:** $\Phi(\lambda)$
  - **Physical limits: color "pigments," 1-bit vs n-bit tones**
  - **Human limits: just-noticable-differences, trichromaticity**
- **Spatial resolution: (x,y)**
  - **Physical limits: controllable pixel size, framebuffer size**
  - **Human limits: photoreceptor density + optics**
- **Temporal resolution: t**
  - **Physical limits: film transport, channel bandwidth**
  - **Human limits: neuronal response time**

Perceptual Resolutions

Experiments

- Resolving lines pairs, sinusoidal gratings
  - Max 50-60 cycles per degree
- Hyperacuity
  - 5 arcsecs for very fine line position judgements!

Photoreceptor mosaic

- Foveal (1deg.) vs. peripheral
- Two types of photorceptors
  - Rods: 100 million total, 1u diameter
  - Cones: 3 subtypes (L,M,N), 5 million total
    1-10 u diameter (fov.-per.),
    Fovea res: 10 arcmins (S), 0.5 arcmins (L,M) spacing

Image Resolutions in Practice

Television

NTSC	640x480x8b	1/4 MB
GA-HDTV	1920x1080x8b	~2MB

Workstations

Bitmapped display	960x1152x1b	~1 Mb
Color workstation	1280x1024x24b	5 MB

Laserprinters

300 dpi	(8.5"x300)(11"x300)	1.05 MB
2400 dpi	(8.5"x2400)(11"x2400)	~64 MB

Film (line pairs/mm)

- 35mm (diagonal) slide (ASA25~125 lp/mm) = 3000
  3000 x 2000 x 3 x 12b ~27 MB

Copyright © Pat Hanrahan

Field of View

Visual field

- **Monocular: 160 deg (h) x 175 deg (v)**
- **Binocular: 200 deg (h) x 135 deg (w)**

Wide field of view creates a sense of immersion

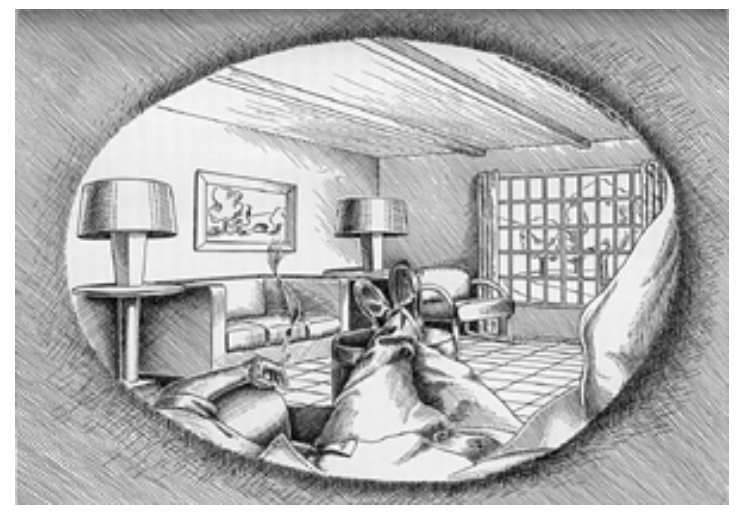

From Gibson 1968

Conventional Television

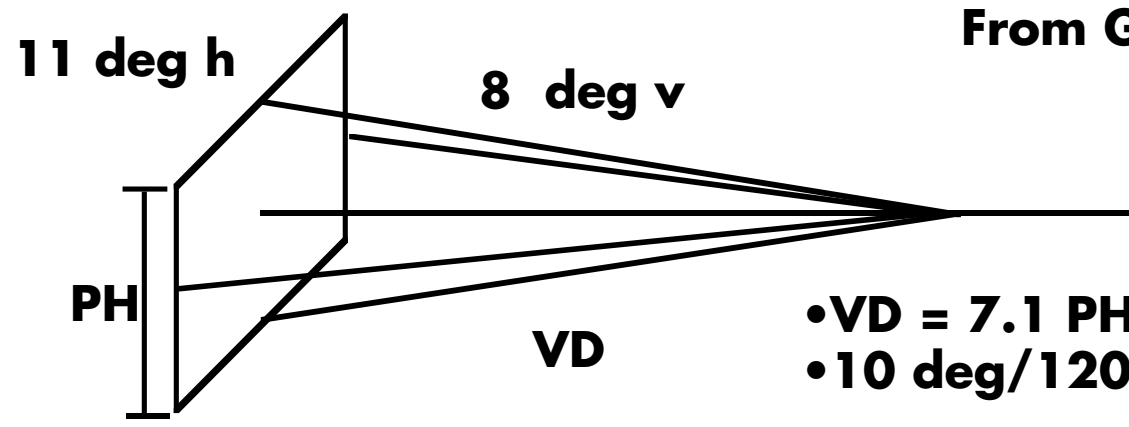

- **VD = 7.1 PH**
- **10 deg/1200 = 0.5 arcmin**

Aspect Ratio

Frame aspect ratio (FAR) = horizontal/vertical size

TV	**4:3**	
HDTV	**16:9**	
Page	**8.5:11 ~ 3/4**	
35mm	**3:2**	
Panavision	**2.35:1**	**(2:1 anamorphic)**
Vistavision	**2.35:1**	**(1.5 anamorphic)**

Pixel aspect ratio (PAR) = FAR vres/hres

Nuisance in graphics if not 1

Refresh Rates and Bandwidth

Critical flicker fusion rate

- **high ambient light, large field: - 80 Hz**
- **low ambient light: 20-30 Hz**

Frames per second (FPS)

Film (double framed)	**24 FPS**
TV (interlaced)	**30 FPS x 1/4 = 8 MB/s**
Workstation (non-interlaced)	**75 FPS x 5 = 375 MB/s**

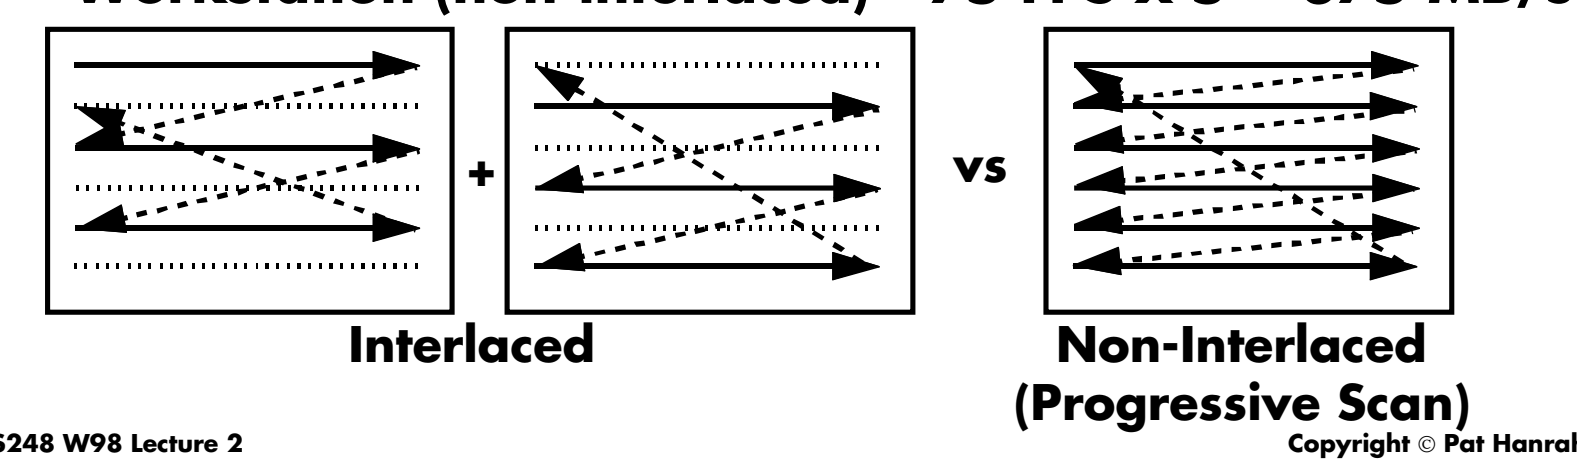

Raster Graphics System Architecture

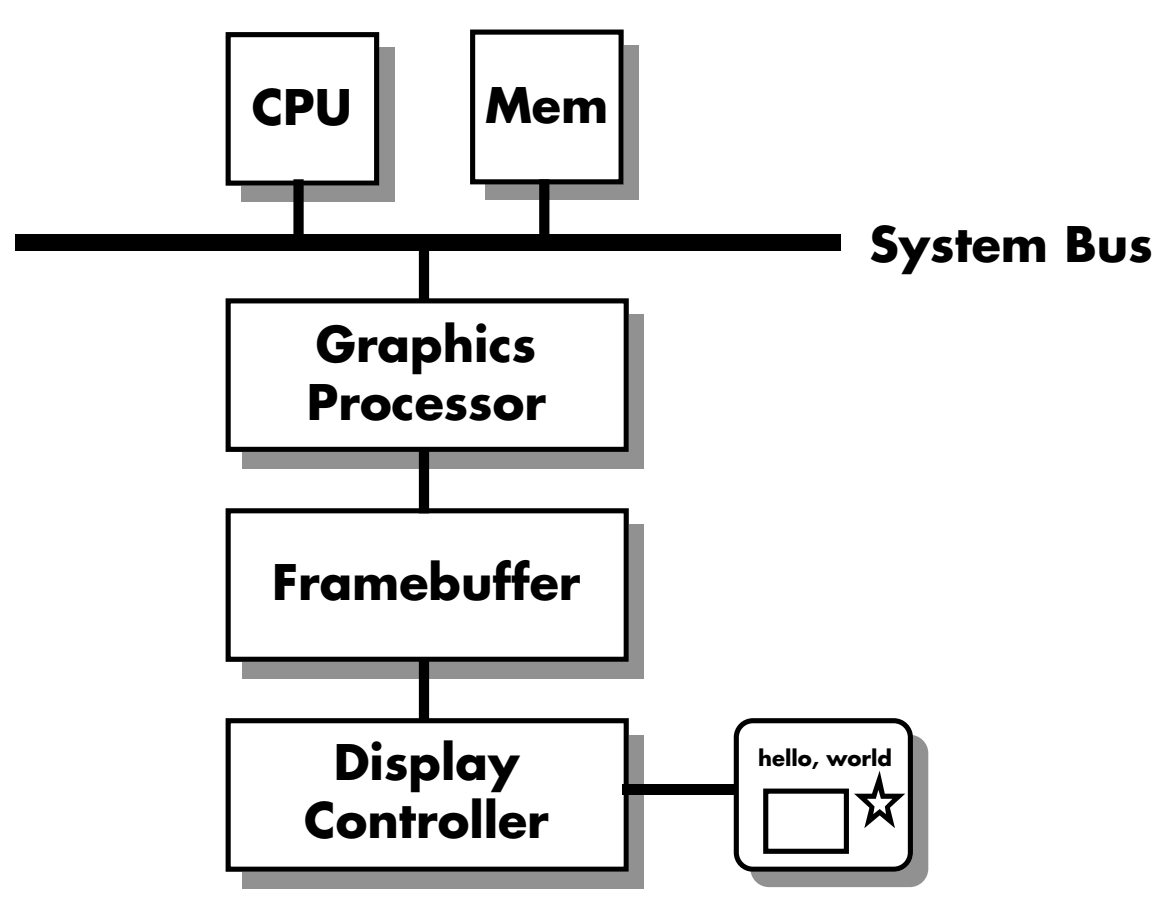

Home PC

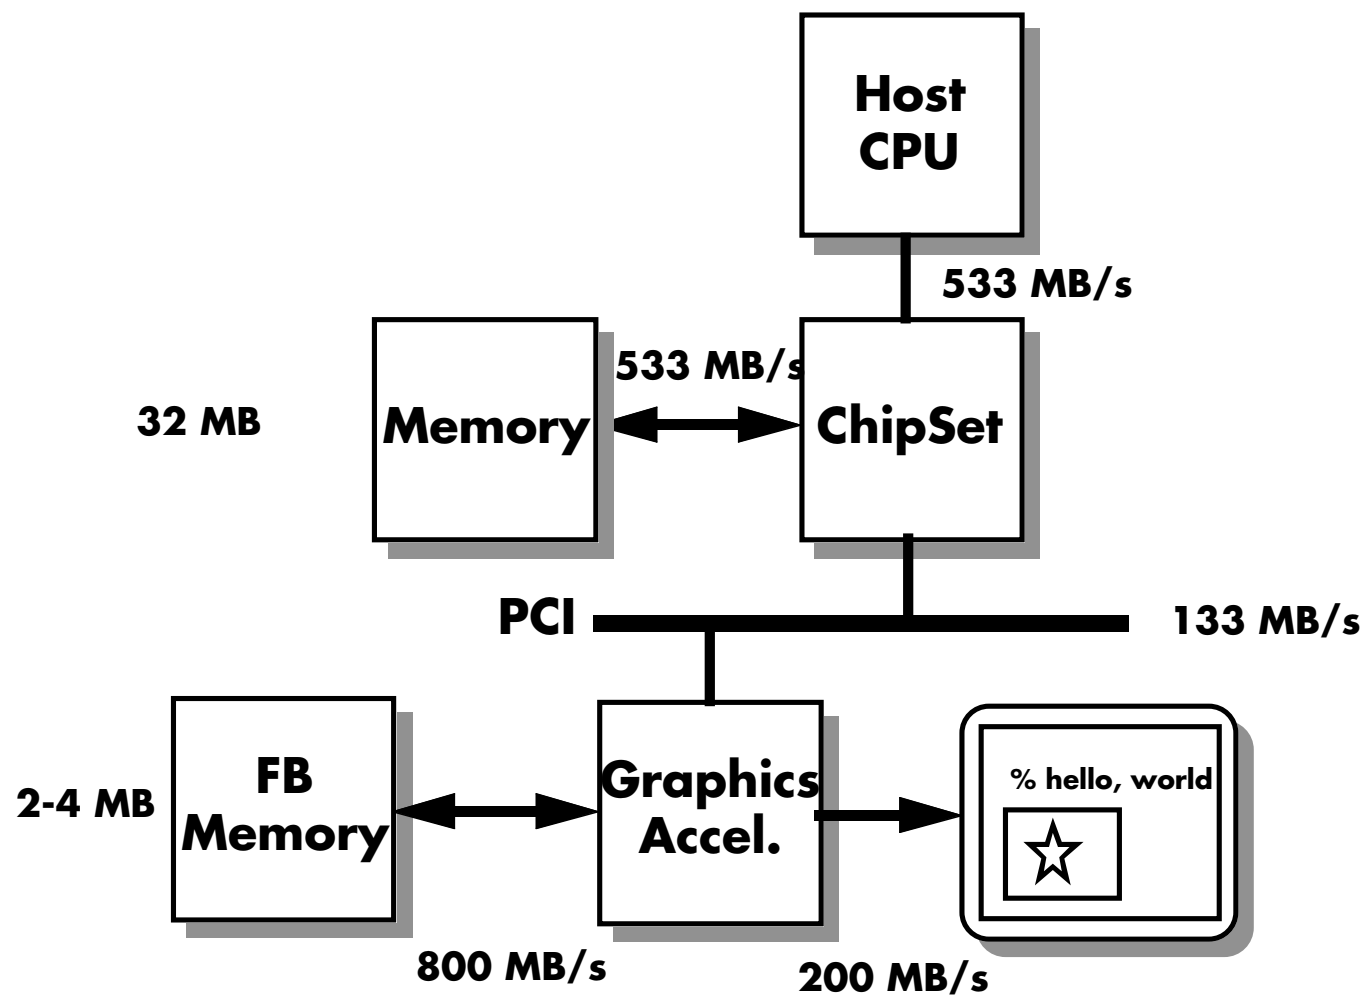

CS248 W98 Lecture 2

SGI Reality Engine

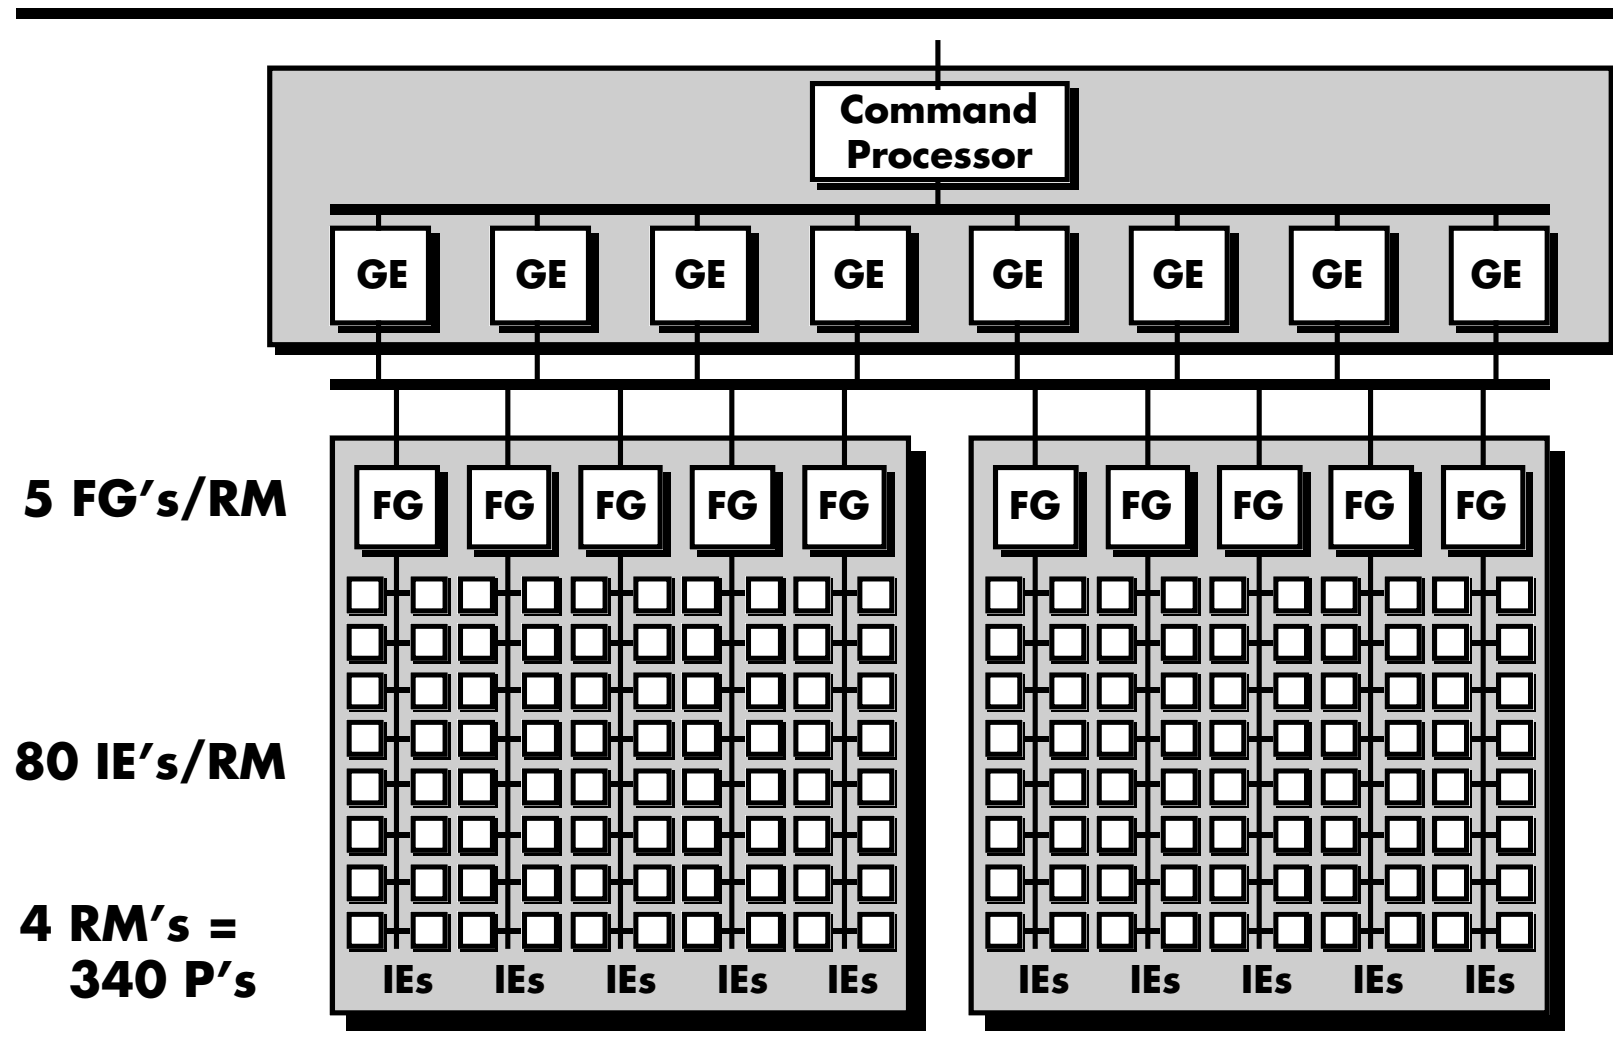

CS248 W98 Lecture 2

OpenGL Architecture

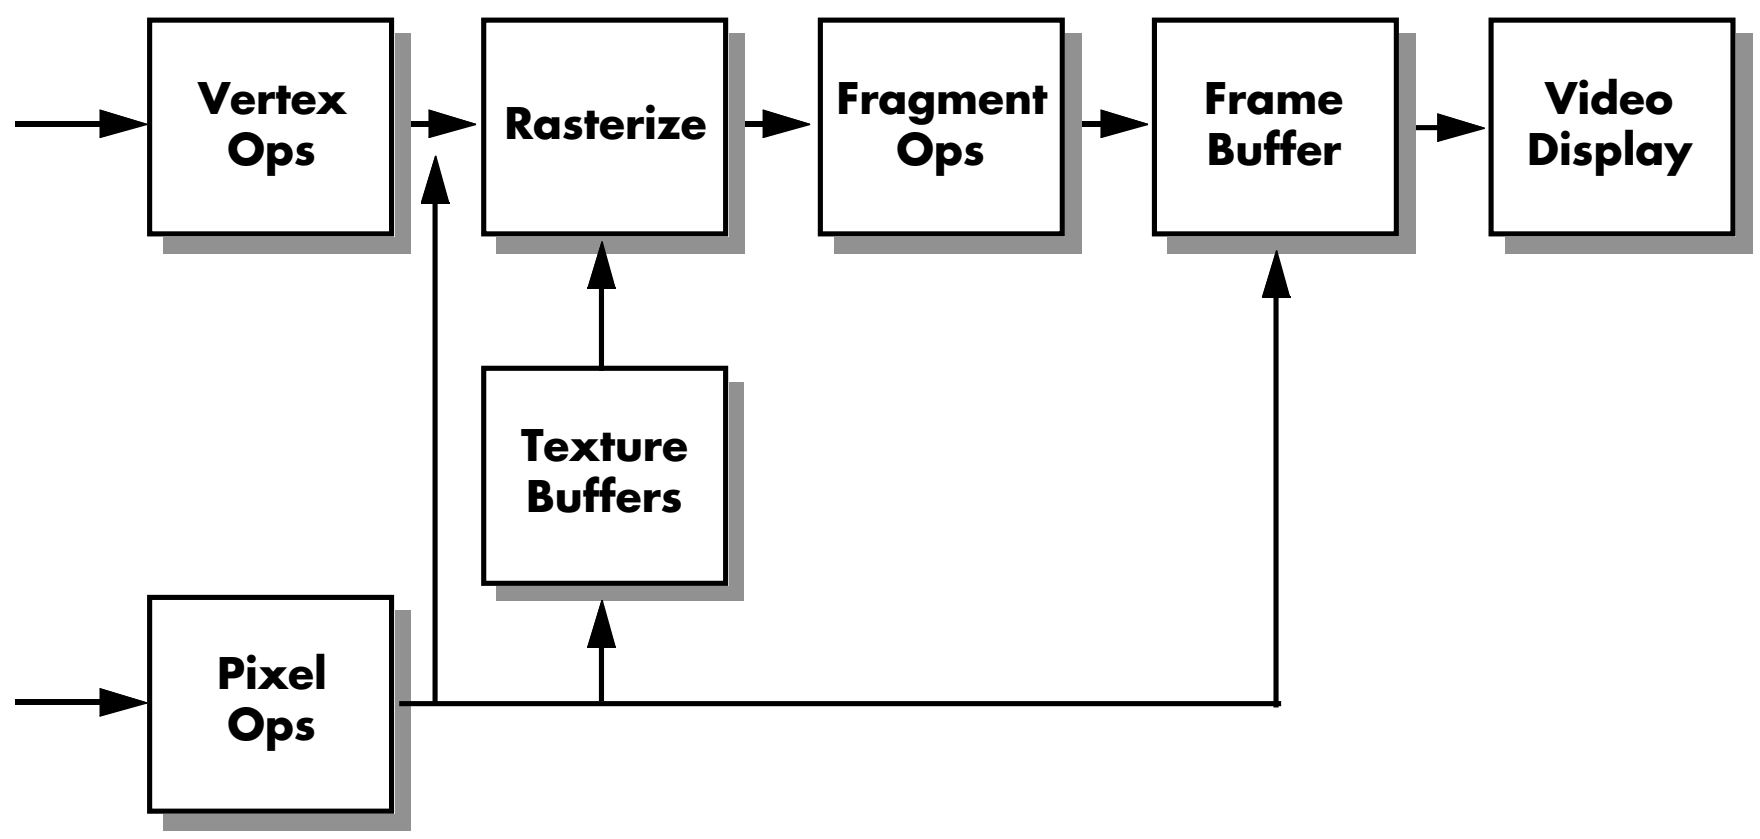

CS248 W98 Lecture 2

RGB Framebuffer

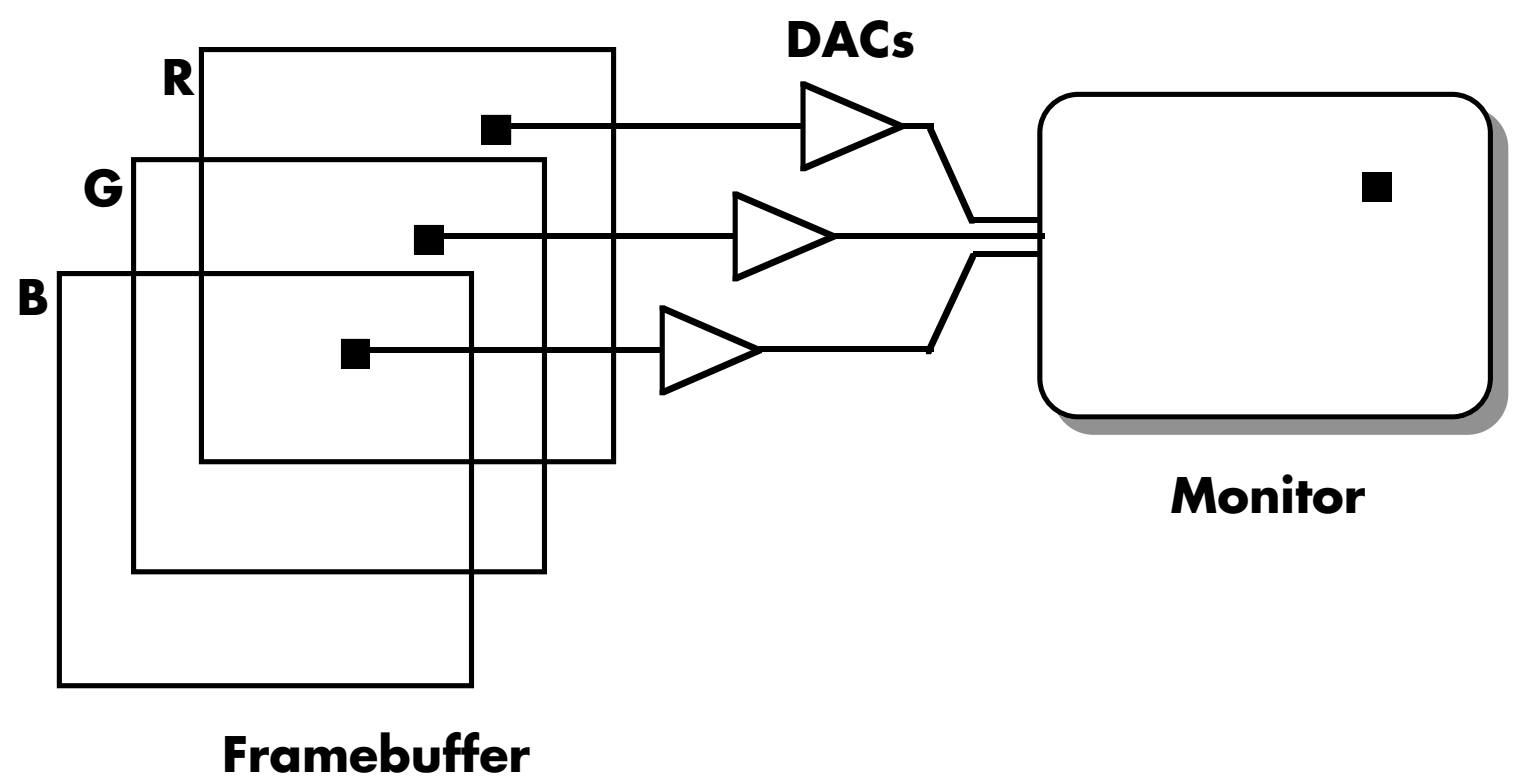

CS248 W98 Lecture 2

Color Index Framebuffer

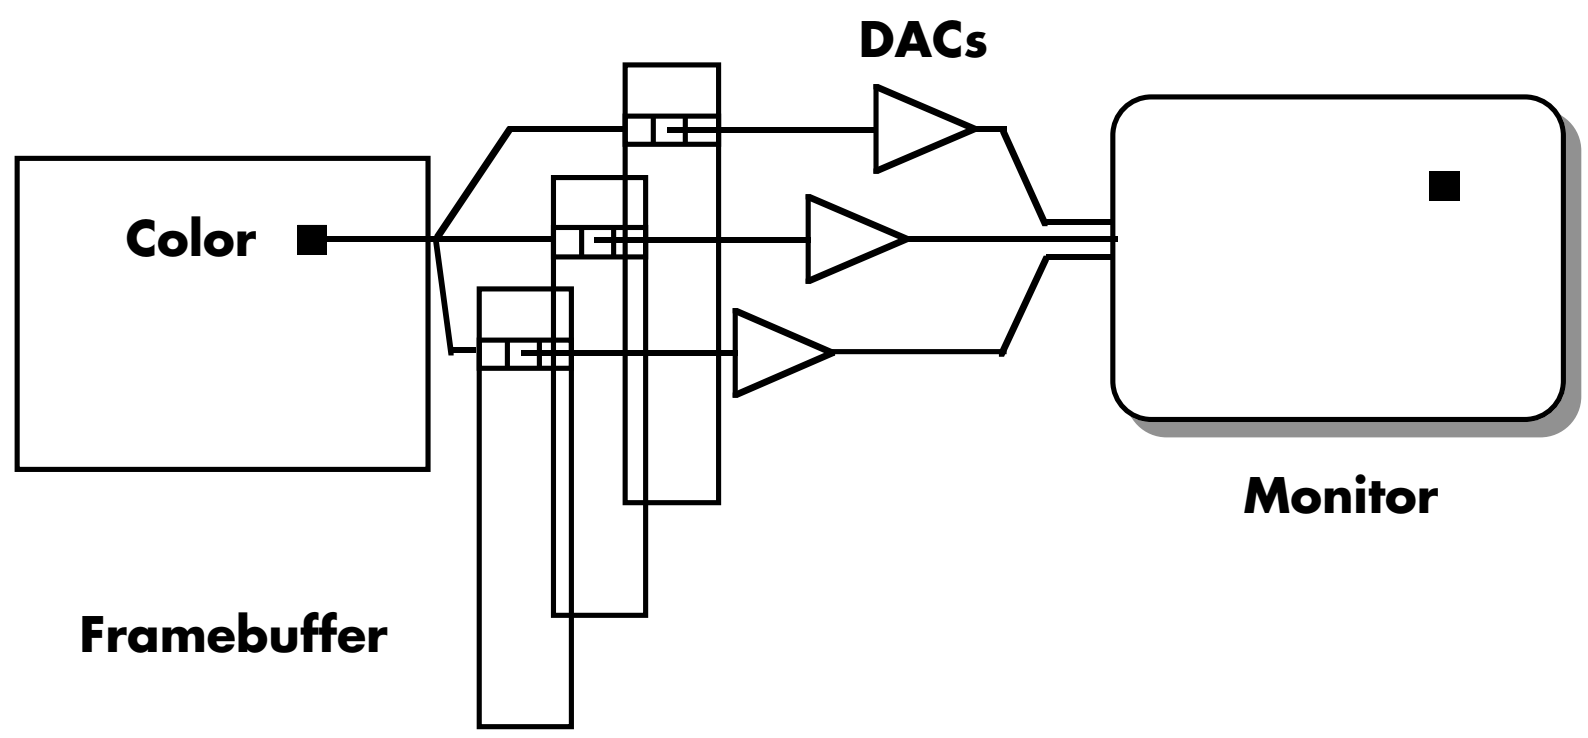

Buffers

- Single and double buffering: Front and Back
- Z-Buffer
- Texture Map Buffer
- Window ID Buffer
- Accumulation Buffer
- Stencil Buffer
- Stereo: Left and Right